

PROCON® Products

Series 4 & 5 Pumps

- Positive Displacement Rotary Vane Pump
- Flow ranging from 115 to 330 gallons per hour (330 GPH pump requires 20 psi inlet pressure)
- Self Priming
- Maintenance Free
- Low Vibration and Pulsation Characteristics
- Stainless Steel, Brass and Low Lead Brass (0.25% Max Lead)
- Models compatible with 48YZ Frame and 56C Frame Motors

(Adapter and Coupling required for 56C Frame Mounting)




SPECIFICATIONS

Body Material	Type 303 stainless steel or brass
Capacity	115 to 330 GPH
Nominal Speed	1725 RPM
Typical Horsepower Required	.25 to 1.5 HP
Maximum Discharge Pressure	250 PSI
Rotation (viewed from nameplate end)	Clockwise
Dry Weight	Approximately 4.5 lbs.
Dimensions	4.1" x 3.88" x 4.48"
Self Priming (water)	6 ft. Maximum Lift
Port Size	1/2 NPT Inlet and Outlet



TYPICAL APPLICATIONS

- Circulation
- Reverse Osmosis
- Booster Pumps
- Solar Applications
- Hydraulic Systems
- Desalination

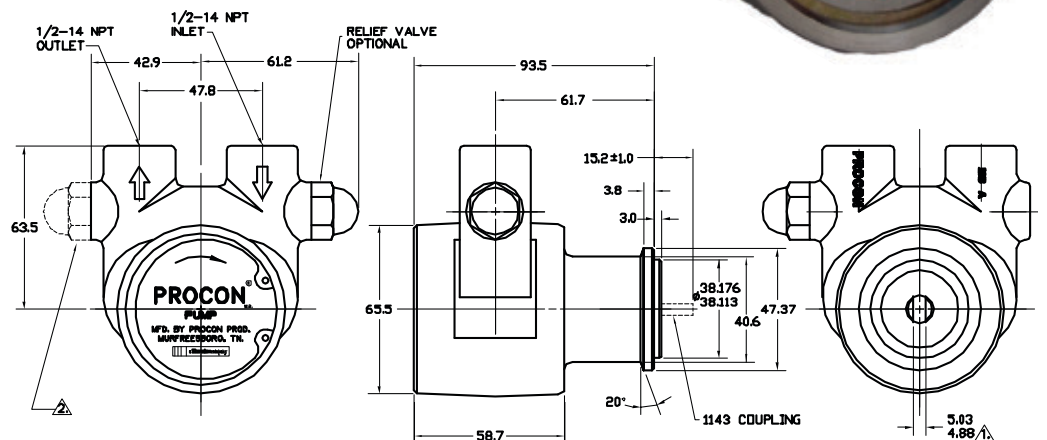

PROCON® Products

World Wide Headquarters

869 Seven Oaks Blvd, Ste 120
Smyrna, TN 37167 USA
Phone: +1 615.355.8000
Fax: +1 615.355.8001

mail@proconpump.com

Standex International S.r.l.

Via 1 Maggio, 20
20064 Gorgonzola (MI) Italy
tel: +39 (02) 95-740951 ext. 213
fax: +39 (02) 95-740713

solari.standex@standexinternational.it
solari@standex.com

Standex (Ireland) Limited

Irishtown, Mountmellick, Co. Laois
Republic of Ireland
tel: +353 (5786) 79114
fax: +353 (5786) 79119

sales@standex.ie

Standex International GmbH

Koelner Strasse 352-354
47807 Krefeld Germany
tel: +49 21 51 371226
fax: +49 21 51 371258

m.schmalohr@standex-gmbh.de



www.proconpump.com

"QUALITY PRODUCTS - DELIVERED ON TIME"



www.goharab.com

تلفن: ۰۲۱-۷۷۱۱۰۷۶۳

info@goharab.com

فکس: ۰۲۱-۸۹۷۸۸۶۶۷

گوهر آب

دانشی بروز - ایده ای بروز



Series 4 & 5 Nominal Volume at 1725 RPM

FLOW RATE (GPH)	GALLONS PER HOUR					BRAKE HORSEPOWER				
	PRESSURE (PSI)					PRESSURE (PSI)				
	50	100	150	200	250	50	100	150	200	250
330	331	330	328	327	326	.33	.55	.78	1.00	1.22
265	265	263	261	259	257	.24	.43	.63	.82	1.01
240	243	240	236	232	228	.21	.37	.54	.70	.86
215	218	215	211	207	203	.20	.35	.50	.65	.80
190	193	190	186	182	178	.18	.33	.47	.61	.75
165	168	165	161	157	153	.17	.30	.43	.57	.70
140	143	140	136	132	128	.16	.28	.40	.52	.64
115	118	115	111	107	103	.15	.25	.35	.45	.55

Series 1 - 6 Rotary Vane pumps - Model Number Matrix

1 1 1 A 100 E 1 1 A A 180		
PRODUCT CLASSIFICATION		PRESSURE SETTING (RELIEF VALVE) (SEE NOTE 5)
1 - ROTARY VANE PUMP		PRESSURE SETTING IN PSI (POUNDS PER SQ. IN.)
AGENCY APPROVALS		PRESSURE RANGE (RELIEF VALVE SPRING)
0 - NON-FOOD GRADE (1.5% Max. Lead) - NO AGENCY APPROVAL		A - 151 TO 250 PSI - DEFAULT SETTING 170 PSI (SEE NOTE 4)
1 - NSF STD. 169 LISTED (1.5% Max. Lead) - (SEE NOTE 1)		10 TO 17 BAR - DEFAULT SETTING 14 BAR
2 - WRC		B - 100 TO 150 PSI - DEFAULT SETTING 130 PSI
3 - FOOD GRADE - (1.5% Max. Lead) NO AGENCY LISTING		7 TO 10 BAR - DEFAULT SETTING 10 BAR
P - SPARE PARTS KIT		C - 60 TO 99 PSI - DEFAULT SETTING 99 PSI
Z - NON-FOOD GRADE (.20% Max. Lead) - NO AGENCY APPROVAL		4 TO 7 BAR - DEFAULT SETTING 7 BAR
4 - NSF STD. 169 LISTED (.20% Max. Lead) - (SEE NOTE 1)		D - 30 TO 59 PSI - DEFAULT SETTING 50 PSI (SEE NOTE 6)
Y - NON-FOOD GRADE (.10% Max. Lead) - NO AGENCY APPROVAL		2 TO 4 BAR - DEFAULT SETTING 3.5 BAR
5 - NSF STD. 169 LISTED (.10% Max. Lead) - (SEE NOTE 1)		X - NO SETTING
W - 254 SMO (316 S/S) - NO AGENCY APPROVAL		
SERIES		VALVE TYPE AND CONFIGURATION
1 - SERIES 1 BRASS - INTEGRAL STRAINER		A - PLASTIC, HI TEMP-BYPASS
2 - SERIES 2 BRASS		B - PLASTIC, HI TEMP-SOLID
3 - SERIES 3 STAINLESS STEEL		C - PLASTIC, HI TEMP BALANCED BYPASS
4 - SERIES 4 BRASS		D - PLASTIC, HI TEMP BALANCED SOLID
5 - SERIES 5 STAINLESS STEEL		F - PLASTIC, HI TEMP-EXTERNAL ADJUST BYPASS
6 - SERIES 6 STAINLESS STEEL		G - PLASTIC, HI TEMP-EXTERNAL ADJUST SOLID
7 - SERIES 7 BRASS MINI PRO		P - BRASS, HI TEMP-SOLID
8 - SERIES 8 STAINLESS STEEL - INTEGRAL STRAINER		R - STAINLESS STEEL, HI TEMP-SOLID
9 - SERIES 9 BRASS SHORT PUMP		1 - PLASTIC, LOW TEMP-BYPASS
MOUNTING AND DRIVE CONFIGURATION		2 - PLASTIC, LOW TEMP-SOLID
A - CLAMP ON WITH .188" DOUBLE FLAT DRIVE		3 - PLASTIC, LOW TEMP BALANCED BYPASS
B - CLAMP ON WITH 1143 BRONZE COUPLING		4 - PLASTIC, LOW TEMP BALANCED SOLID
C - CLAMP ON WITH 1143-2 PLASTIC COUPLING		5 - PLASTIC, LOW TEMP-EXTERNAL ADJUST BYPASS
D - CLAMP ON WITH SLOTTED SHAFT ONLY - NO COUPLING		6 - PLASTIC, LOW TEMP-EXTERNAL ADJUST SOLID
E - BOLT ON WITH SINGLE FLAT DRIVE (SERIES 1-5 ONLY)		X - NO RELIEF VALVE
J - BOLT ON WITH .25 DOUBLE FLAT DRIVE (SEE NOTE 2)		
K - BOLT ON WITH 3018 BRONZE COUPLING		CLEARANCES
L - BOLT ON WITH 3018-1 OVERSIZE BRONZE COUPLING		1 - STANDARD CLEARANCE
M - BOLT ON WITH SLOTTED SHAFT ONLY		2 - SPCL CLEARANCE (1x) LINER & BRGS
N - BOLT ON WITH KEY SLOT DRIVE (SERIES 6 ONLY)		3 - SPECIAL CLEARANCE (2x) LINER & (1x) BRGS.
P - CLAMP ON WITH 1143-3 OVERSIZE BRONZE COUPLING		4 - STANDARD CLEARANCE WITH SEAL CIRCULATION
R - LONG CLAMP ON WITH DOUBLE FLAT DRIVE (SEE NOTE 11)		5 - SPCL CLEARANCE (1x) LINER AND (1x) SEAL CIRC. BRGS.
S - CLAMP ON WITH SINGLE FLAT DRIVE		6 - SPCL CLEARANCE (1x) LINER AND (2x) SEAL CIRC. BRGS.
T - BOLT ON WITH FAEMA STYLE MOUNT		
FLOWRATE (SEE NOTE 10)		ROTATION / SLINGER / PASSIVATION / STRAINER
SERIES 1, 2 AND 3		1 - CLOCKWISE
015 - 15 GPH (45 LPH)		2 - COUNTERCLOCKWISE
025 - 25 GPH (75 LPH)		3 - CLOCKWISE / SLINGER
035 - 35 GPH (100 LPH)		4 - COUNTERCLOCKWISE / SLINGER
050 - 50 GPH (150 LPH)		7 - CLOCKWISE / COARSE STRAINER
060 - 60 GPH (180 LPH)		8 - CLOCKWISE / SLINGER / COARSE STRAINER
070 - 70 GPH (210 LPH)		
080 - 80 GPH (240 LPH)		ELASTOMER
100 - 100 GPH (300 LPH)		F - FDA GRADE NITRILE - TYPE 21 OR TYPE 2106
110 - 110 GPH (HIGH FLOW) (330 LPH)		USED INTERCHANGEABLY
125 - 125 GPH (HIGH FLOW) (375 LPH)		G - ETHYLENE PROPYLENE - TYPE 21 SEAL (SEE NOTE 8)
140 - 140 GPH (HIGH FLOW) (425 LPH)		R - FLUOROCARBON - TYPE 21 SEAL
		S - NEOPRENE - TYPE 21 SEAL (SEE NOTE 9)
		W - ETHYLENE PROPYLENE - TYPE 21 SEAL - WRC APPROVED COMPOUND
SERIES 4 AND 5		
115 - 115 GPH (350 LPH)		
140 - 140 GPH (425 LPH)		
165 - 165 GPH (500 LPH)		
190 - 190 GPH (575 LPH)		
215 - 215 GPH (650 LPH)		
240 - 240 GPH (725 LPH)		
265 - 265 GPH (800 LPH)		
330 - 330 GPH (HIGH FLOW) - NO RELIEF VALVE (1000 LPH)		
SERIES 6		
300 - 300 GPH - NO RELIEF VALVE (900 LPH)		
360 - 360 GPH - NO RELIEF VALVE (1080 LPH)		
420 - 420 GPH - NO RELIEF VALVE (1260 LPH)		
480 - 480 GPH - NO RELIEF VALVE (1440 LPH)		
540 - 540 GPH - NO RELIEF VALVE (1620 LPH)		
600 - 600 GPH - NO RELIEF VALVE (1800 LPH)		
660 - 660 GPH - NO RELIEF VALVE (2000 LPH)		

NOTES:

- Brass pumps are NSF listed for potable water only. Stainless steel pumps are NSF listed for potable and carbonated water. (Nitrile elastomer only.)
- Bolt on model with .25" double flat drive for use in Japan only. (No NSF available.)
- Counterclockwise rotation not available for Series 1 pumps.
- For the Beverage Industry - the default relief valve pressure setting is 250 PSI.
- The relief valve pressure setting is not part of the model matrix number. It is for customer reference only.
- This pressure range is not available in valve configurations C, D, K or L.
- Passivation is defined as a passivated housing only. No other parts are passivated.
- The EP elastomer is no longer available for Series 6 pumps.
- Neoprene elastomer not available for the following relief valve configurations: C, D, F, 3, 4, 5, and 6.
- GPH rating at 60HZ (1750 RPM) - LPH rating at 50HZ (1400 RPM).
- Long clamp on pumps are series 1 and 4 only

